


Heating Components

Compressors, Chillers, Condensers
 Motors
 Electrical
 Heating Components
 Indoor Air Quality
 Thermostats
 Oils & Chemicals
 Accessories, Supplies & Commodities
 Tools & Instruments
 Refrigeration

PILOT ORIFICES

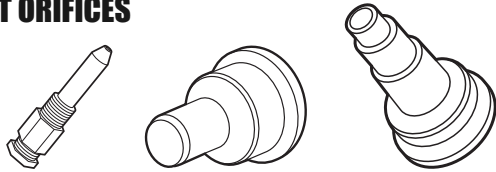

White-Rodgers used with "E" series pilots


PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS
LH39WD010	0.01	10U	LP
LH39WD012	0.012	12U	LP
LH39WD018	0.018	18U	NAT
LH39WD020	0.02	20U	NAT

BDP used with 732, 733, 734 and 740 pilots

PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS
LH39JN001	0.017	BRIGHT	NAT

Honeywell used with Q308, Q314, Q345 pilots

PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS
LH32RMO15	0.01	BLACK	LP
LH32RMO16	0.018	BRIGHT	NAT
LH32AN012	0.012	BBR12	LP
LH32AN014	0.014	BBR14	NAT

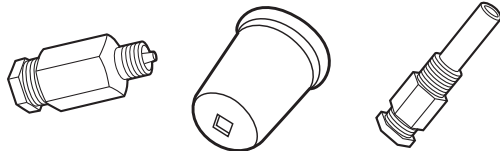

General controls used with 26T pilots

PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS
LH32DB001	0.01	0.01	LP

Robertshaw used with 2CH pilots


PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS
LH32DB002	0.01	LP10	LP

Penn used with "J" series pilots

PART NO	ORIFICE SIZE	PART MARKING	TYPE GAS	DIM (in)
LH32RN109	0.009	4209	LP	39/64
LH32RN009	0.009	4709	LP	1-1/32
LH39GB011	0.011	4711	LP	1-9/64
LH39GB019	0.018	7218	NAT	39/64
LH39GB022	0.023	3723	NAT	39/64


FAN, LIMIT CONTROLS

LIMIT CONTROLS



- Manual reset
- For line or low voltage circuit
- Differential limit 25° F
- Non-adjustable settings
- Element length: 3"


PART NO	SWITCH TYPE	TEMP SETTINGS (F)	
		OPENS	CLOSES
HH12AD204	SPST	200	175



- Temp setting: adj. 160° - 250°F (HH127ZA008) (HH680400)
- adj. 150° - 250°F (HH12ZA011)(HH680405)
- Differential: 30° F
- Switch: SPST


PART NO	ELEMENT LENGTH (in)
HH12ZA008	3-3/8
HH680400	3
HH680405	7-3/8
HH680405	7

FAN CONTROLS



- Knurled shafts for adjustment of temperature setting and differential
- Slotted for two screw mounting
- Switch type: SPST
- Temp setting: fan off – adj. 80° F - 120° F
- Fan differential: adj. 20° F - 50° F

PART NO	ELEMENT LENGTH (in)
HH12AB140	7
HH12AB141	3



- Quick connect terminals
- 24-volt fan assist heater
- Tube construction for strength
- Slotted for 2 screw mounting
- Switch type: SPST
- Adjustable fan settings
- Temp. Setting: fan off – adj. 80° F - 120° F
- Fan differential: 30° F

PART NO	ELEMENT LENGTH (in)
HH12HA070	1-1/4