


HENRY TECHNOLOGIES - RECEIVER VALVES — Packed, Angle Type

Forged Brass — Non-Back-Seating

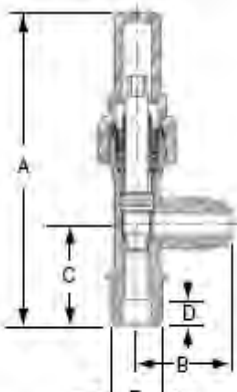

P4485

ANGLE VALVE
NON-BACK-SEATING
TYPE 776-B

- Temperature Rating: -20° F to +300° F
- 500 PSI Maximum Working Pressure
- Forged Brass Body

PART NO	SIZE CONN (in)		DIMENSIONS IN INCHES					WT (Lb)
	BOTTOM	Side	A	B	C	D	E	

Forged Brass — Non-Back-Seating

7761-B	1/4 MPT	1/4 FL	3.80	1.25	1.25	.31	1/4 ODS	.35
7771-B	1/4 MPT	1/4 FPT	3.80	1.25	1.25	.31	5/16 ODS	.35
7763-B	1/4 MPT	3/8 FL	3.80	1.25	1.25	.31	5/16 ODS	.35
7764-B	3/8 MPT	1/4 FL	3.80	1.25	1.25	.31	3/8 ODS	.35
7766-B	3/8 MPT	3/8 FL	3.80	1.25	1.25	.31	3/8 ODS	.35
7767-B	3/8 MPT	1/2 FL	3.80	1.25	1.25	.31	3/8 ODS	.40
7768-AB	1/2 MPT	3/8 FL	3.94	1.25	1.38	.31	1/2 ODS	.59
7768-B	1/2 MPT	5/8 FL	4.56	1.62	1.38	.31	1/2 ODS	.91


Forged Brass — Back-Seating

7792-B	1/2 MPT	1/2 FL	4.88	1.28	1.69	.38	1/2	.62
7793-B	1/2 MPT	5/8 FL	4.88	1.53	1.69	.38	1/2	.69

Forged Brass — Back-Seating*

7830	3/8 ODS	4.34	1.28	1.16	.31	—	.54	
7831	1/2 ODS	4.47	1.28	1.25	.38	—	.54	
7832	5/8 ODS	4.58	1.25	1.41	.50	—	.54	
7833	7/8 ODS	5.44	1.75	1.69	.75	—	1.06	
7834	1-1/8 ODS	7.10	1.75	2.00	.94	—	1.83	
7835	1-3/8 ODS	7.42	2.00	2.25	1.00	—	2.40	
7836	1-5/8 ODS	9.14	2.13	2.44	1.09	—	3.53	


*Furnished with 1/4-in. flare capped charging and testing connection above back-seat.

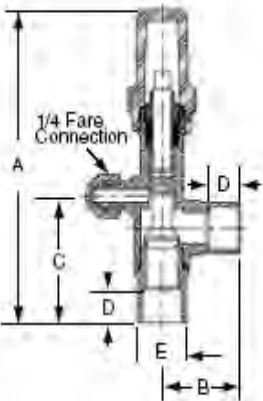

P4484

ANGLE VALVE
BACK-SEATING
TYPE 779-B, TYPE 783

HENRY TECHNOLOGIES - PACKED ANGLE TYPE, CHARGING AND PURGING

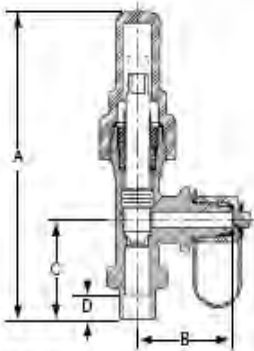

P4486

TYPE 927
NON-BACKSEATING

- Forged Brass Body, Plated Black Oxidized Steel Stem and Molded Valox Seal Cap, Brass Flare Caps.
- Temperature Rating: -20° F (-29° C) to +300° F (+149° C).
- Maximum Working Pressure: 500 PSI, (35 Kg/cm²)
- Valves Furnished Disassembled to Avoid Excessive Heating of Internal Parts During Brazing.

PART NO	SIZE CONN (in)		DIMENSIONS (in)				WT(lb)
	Bottom	Side	A	B	C	D	
9270	1/4 ODS	1/4 Flare	3.88	1.25	1.25	.31	.40
9271	3/8 ODS	1/4 Flare	3.88	1.25	1.25	.31	.40
9272	3/8 ODS	3/8 Flare	3.88	1.25	1.25	.31	.46
9273	1/2 ODS	1/4 Flare	3.88	1.25	1.25	.38	.40
9274	1/2 ODS	3/8 Flare	3.88	1.25	1.25	.38	.46