


Refrigeration

MUELLER - CHANGEOVER MANIFOLD

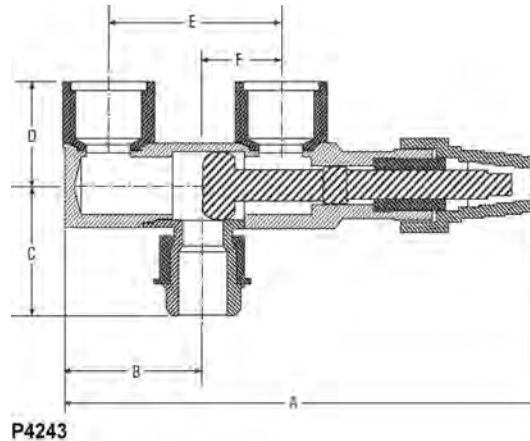

P4243

SPECIFICATIONS

TECHNICAL DATA

Manifold	A17921	A 17922	34550	B 35271	A 17923	A 17924	B 34559	B 34654	B 35272	B 35273
Torque to seal:										
Front seat (ft.-lbs)	16-18				22-40					
Back seat (ft.-lbs)	16-18				25-45					
Pack Gland (ft.-lbs.)	8-12				15-25					
Seal cap	Finger Tight									
Maximum working pressure	500 psig.									
Burst Pressure	2500 psig.									
Working Temperature Range	-40/+300°F									
Refrigerants	All Fluorinated Type									

PART NO	INLET	OUTLETS	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
A 17921	1/2 NPTFE	1/2 NPTFI	6	1-3/4	1-3/4	1-3/8	2-1/16	3/4
A 17922	3/4 NPTFE	3/4 NPTFI	6	1-3/4	1-7/8	1-3/8	2-1/16	3/4
A 17923	1 NPTFE	1 NPTFI	8-11/16	2-7/16	2-3/8	1-7/8	3-1/8	1-7/16
A 17924	1-1/4 NPTFE	1-1/4 NPTFE	8-7/8	2-7/16	2-7/16	2-1/8	3-1/8	1-7/16
B 34550	7/8-14 UNF 2A	7/8-14 UNF 2B	6	1-3/4	1-5/8	1-3/8	2-1/16	3/4
B 34559	1-5/16-12 UNF 2A	1-5/16-12 UNF 2B	8-9/16	2-7/16	2-1/8	1-3/4	3-1/8	1-7/16
B 34654	1-5/8-12 UNF 2A	1-5/8-12 UNF 2B	8-9/16	2-7/16	2-1/8	1-13/16	3-1/8	1-7/16
B 35272	1 NPTFI	1 NPTFI	11-13/32	5-13/32	1-15/16	1-31/32	1-7/8	1-7/16
B 35273	1-1/4 NPTFI	1-1/4 NPTFI	11-13/32	5-13/32	1-15/16	1-31/32	1-7/8	1-7/16
B 35271	3/4 NPTFI	3/4 NPTFI	7-23/32	3-17/32	1-11/16	1-11/16	3-5/8	3/4