



PARKER - SPUN COPPER DRIERS

KEY FEATURES & BENEFITS

- 100% molecular sieve beads for max water capacity.
- Spun copper shells and ends for easy solder installation.
- Brass or stainless steel screen material for corrosion resistance and maximum contaminant removal.
- Perforated baffle support plate ensures rigid containment of molecular sieve.
- UL recognized components. File #SA8570 CSA LR87950.
- Available in a variety of inlet and outlet sizes.
- One and two inlets are available as well as cap tube sizes on outlet from .081 to .125.

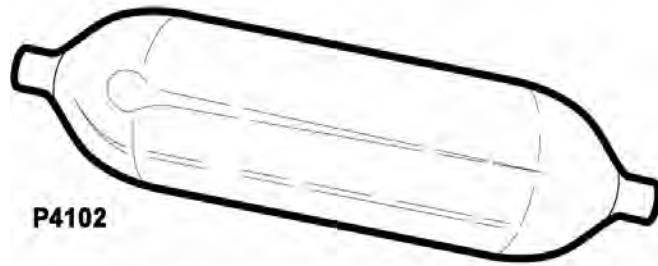

P4102

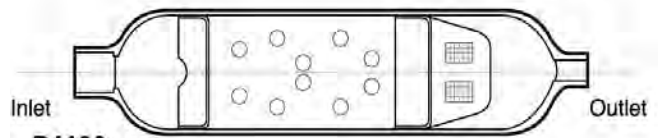

P4103

Recommended tonnages: 1/4 to 1/2 tons depending on application and system. Consult Parker.

Recommended tonnages: 1/4 to 1/2 tons depending on application and system. Consult Parker.

3/4" O.D. Copper Driers

PART NO	OVERALL LENGTH (in)	Inlet (in)	Outlet (in)	Design Working Pressure PSI
032099-00	4.63	.164	--	360
032099-00	4.63	.159	.091	360
032099-00	4.63	.258	.086	360
032099-00	4.63	.253	--	360
032159-00	4.50	.164	.091	360
032159-00	4.50	.159	.086	360
032200-00	4.37	.195	.081	500
032200-00	4.37	.190	.076	500
032169-00	4.75	.197	.092	360
032169-00	4.75	.192	.087	360

3/4" O.D. Copper Driers Water Capacities

Part No.	Water Capacity in Drops of Water													
	R-12		R-22		R-134a		R-401A/B		R-401C		R-402A		R-402B	
	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°
032099-00	33.0	30.6	29.8	27.4	32.6	31.0	32.6	30.2	30.6	28.8	33.2	30.6	33.0	30.6
032159-00	33.0	30.6	29.8	27.4	32.6	31.0	32.6	30.2	30.6	28.8	33.2	30.6	33.0	30.6
032200-00	28.1	26.0	25.3	23.3	27.7	26.4	27.7	25.7	26.0	24.5	28.2	26.0	28.1	26.0
032169-00	33.0	30.6	29.8	27.4	32.6	31.0	32.6	30.2	30.6	28.8	33.2	30.6	33.0	30.6


Part No.	Water Capacity in Drops of Water													
	R-404A		R-407A		R-407B		R-407C		R-410A		R-502		R-507A	
	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°
032099-00	32.8	30.6	24.2	22.2	24.2	22.2	26.2	23.6	19.8	17.4	30.4	28.6	32.8	30.8
032159-00	32.8	30.6	24.2	22.2	24.2	22.2	26.2	23.6	19.8	17.4	30.4	28.6	32.8	30.8
032200-00	27.9	26.0	20.6	18.9	20.6	18.9	22.3	20.1	16.8	14.8	25.8	24.3	27.9	26.2
032169-00	32.8	30.6	24.2	22.2	24.2	22.2	26.2	23.6	19.8	17.4	30.4	28.6	32.8	30.8

One and two inlets are available as well as cap tube sizes on outlet from .081 to .125.

NOTE: All items on this page are non-stock and require a minimum 100-piece order.

PARKER - SPUN COPPER DRIERS

1" O.D. Copper Driers

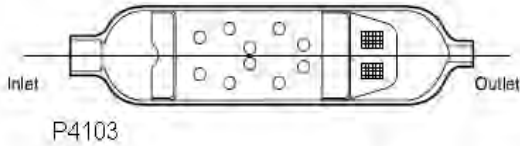

Recommended tonnages (PN 032083-00 & 058066-00):
1/4 to 1/2 tons depending on application and system.

Consult Parker.

Recommended tonnages (Part Number 057404-00):

R-12 = 1/2; R-22 = 2; R-134a = 2; R-401A = 2; R-404A = 1.3;
R-410A = 2; R-502 = 1.3; and R-507A = 1.3.

PART NO	OVERALL LENGTH (in)	Inlet (in)	Outlet (in)	Design Working Pressure PSI
032083-00	4.00	.250	.098	500
032083-00	4.00	.244	.093	500
058066-00	4.19	.380	--	500
058066-00	4.19	.377	.195	500
058066-00	4.19	.256	.190	500
058066-00	4.19	.253	--	500
057404-00	3.81	.320	.320	500
057404-00	3.81	.315	.315	500

1" O.D. Copper Driers Water Capacities

Part No.	Water Capacity in Drops of Water													
	R-12		R-22		R-134a		R-401A/B		R-401C		R-402A		R-402B	
	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°
032083-00	43.0	39.4	N/R	N/R	40.32	37.68	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
058066-00	49.5	45.9	44.7	41.1	48.9	46.5	48.9	45.3	45.9	43.2	49.8	45.9	49.5	45.6
057404-00	60.5	58.6	54.7	50.6	59.8	57.0	58.6	53.1	57.0	52.5	59.4	53.8	59.4	53.8

Part No.	Water Capacity in Drops of Water													
	R-404A		R-407A		R-407B		R-407C		R-410A		R-502		R-507A	
	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°	75°	125°
032083-00	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R	N/R
058066-00	49.2	45.9	36.3	33.3	36.3	33.3	39.3	35.4	29.7	26.1	45.6	42.9	49.2	46.2
057404-00	59.5	56.0	39.4	35.6	39.4	35.6	41.9	37.8	32.3	28.8	55.7	52.5	60.2	56.3

NR = Not Recommended. Consult Parker for more information.

NOTE: All items on this page are non-stock and require a minimum 100-piece order.