
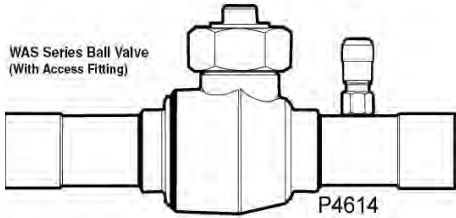


SUPERIOR® - BALL VALVES

WA SERIES (WELDED)

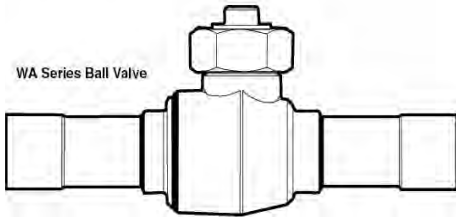

WAS Series (Welded with Access Fittings)

- Full Refrigeration Service Temperature Range of -40° F to +325° F.
- Forged Brass Body and Seal Cap.
- Design Working Pressure: 700 psig.
- U.L. Listed File No. 3462 (N).
- No Synthetic “O” Ring Seals. Double Seal Protection Provides a Superior Stem Design.
- Polished Brass Ball or chrome plated steel ball.
- Seal Cap Design Permits Valve Operation Without Removal of Seal Cap.
- All INTEGRA-SEAL® Ball Valves are suitable for use with R12, R-22, R-500, R-502, R-134A, R-123, R- 25, R-404A, R-402B, R-402A, R-410a, R507and for Industrial Oxygen Usages.

PART NO	PART NO WITH ACCESS FITTING	CONNECTION (ODS)	BALL PORT DIAMETER	WEIGHT (lb)	
				WA	WAS
586WA-4ST	—	1/4	0.50	0.7	N/A
586WA-6ST	586WAS-6ST	3/8	0.50	0.7	0.77
586WA-8ST	586WAS-8ST	1/2	0.50	0.7	0.77
586WA-10ST	586WAS-10ST	5/8	0.50	0.7	0.77
587WA-12ST	—	3/4	0.75	1.0	N/A
587WA-14ST	587WAS-14ST	7/8	0.75	1.0	1.10
591WA-11ST	591WAS-11ST	1-1/8	1.00	2.2	2.42
592WA-13ST	592WAS-13ST	1-3/8	1.50	3.8	4.18
593WA-15ST	593WAS-15ST	1-5/8	1.50	3.8	4.18
594WA-21ST	594WAS-21ST	2-1/8	2.01	8.0	8.80
594WA-25ST*	—	2-5/8	2.01	11.0	N/A
594WA-31ST*	—	3-1/8	2.01	11.0	N/A
595WA-25ST	595WAS-25ST	2-5/8	2.44	15.0	15.80
596WA-31ST	596WAS-31ST	3-1/8	2.91	25.0	26.00
596WA-35ST*	—	3-5/8	2.91	26.0	N/A
596WA-41ST*	—	4-1/8	2.91	27.0	N/A

* Reduced ports

Compressors,
Chillers, Condensers

Motors

Electrical

Heating
Components

Indoor Air
Quality

Thermostats

Oils &
Chemicals

Accessories, Supplies
& Commodities

Tools &
Instruments

Refrigeration