


## SUPERIOR - H-V CHECK VALVES — Horizontal or Vertical Installation

### Type 802B Check Valve Series


ODS x ODS Tube Extensions\*



PART NO	SIZE (in)	WEIGHT (lb)
802B-4ST	1/4	0.50
802B-6ST	3/8	0.50
802B-8ST	1/2	0.75
803B-10ST	5/8	0.75
804A-14ST	7/8	1.00

\* Tube extensions permit valve to be silver soldered directly to line without disassembly.

## SUPERIOR - IN-LINE CHECK VALVES

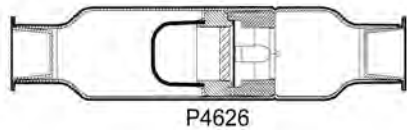

- Hermetically sealed, spun copper bodies
- 30 mesh screen for debris protection
- Magnetic actuation
- Flow directional
- UL and CUL listed
- Minimal pressure drop

PART NO	ODS (in)	LENGTH (in)	OPENING PRESSURE (oz/sq.in)	MWP (psig)	BURST PRESSURE (psig)
900MA-4S	1/4	4.00	1.2	800	4000
900MA-6S	3/8	4.00	1.3	800	4000
900MA-8S	1/2	5.00	3.5	640	3200
900MA-10S	5/8	5.00	3.5	640	3200
900MA-12S	3/4	7.00	3.8	560	2800
900MA-14S	7/8	7.00	3.8	560	2800
900MA-11S	1-1/8	8.38	6.8	400	2000
900MA-13S	1-3/8	9.38	10.2	440	2200
900MA-15S	1-5/8	10.5	11.4	420	2100
900MA-21S	2-1/8	12.00	18.1	400	2000
900MA-25S	2-5/8	13.00	23.0	380	1900