


MOTORS

BEARINGS

BALL BEARING CARTRIDGE UNITS




- Light duty series
- Molded rubber outer liner
- Eccentric self-locking collar
- Permanently lubricated
- Quiet operation
- Width: 1"

PART NO	OUTSIDE DIA (in)	BORE DIA (in)
P461-2202	2.5	1/2
P461-2502	2.5	5/8
P461-2302	1.8	3/4
P461-2304	2.5	3/4
P461-2201	1.7	1/2
P461-2102	2.5	1
P461-2103*	2.5	1
P461-2901	2.5	1-3/16

*Width 3/4 inch.

CARTRIDGE UNITS



- Porous bronze sleeve
- Sealed type
- Self-aligning

PART NO	OUTSIDE DIA (in)	BORE DIA (in)	WIDTH (in)
P461-2303	1-13/16	3/4	1
P461-2101	2-1/2	1	1-3/8

TOTALINE® BRONZE BEARING




- Porous bronze sleeve
- Oil cup

PART NO	OUTSIDE DIA (in)	BORE DIA (in)	WIDTH (in)
P461-2301*	1-11/16	3/4	1-1/4

*Requires Isolator P461-2001.

BALL BEARING CARTRIDGE UNITS


PART NUMBER SIGNIFICANCE

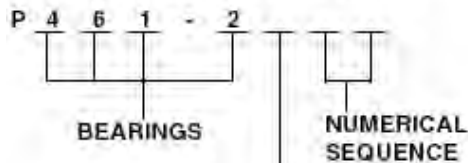

DIAMETER OR BORE

- 1 = 1 INCH
- 2 = 1/2 INCH
- 3 = 3/4 INCH
- 4 = 1-1/8 INCH
- 5 = 5/8 INCH
- 6 = 1-3/8 INCH
- 7 = 7/8 INCH
- 8 = 13/16 INCH
- 9 = MISC

BRONZE BEARING PILLOW BLOCKS



- Porous bronze sleeve
- Self-aligning
- Spherical bearing cartridge
- Quiet operation
- Oil cup for re-lubrication

PART NO	BASE TO SHAFT CENTER (in)	MOUNTING CENTER DIST (in)	BORE DIA (in)
P461-2504	1	3-1/8	5/8
P461-2305*	1	3-1/8	3/4
P461-2106	1	4-1/16	1
P461-2107	1-3/8	3-5/16	1

*Oil cup is at bottom of bearing, but can be converted.

BALL BEARING PILLOW BLOCKS

LIGHT DUTY SERIES



- Light duty series
- Permanently lubricated
- Rubber cushion interliner
- Eccentric locking collar
- Two-piece pressed steel housing
- Self-aligning

PART NO	BASE TO SHAFT CENTER (in)	MOUNTING CENTER DIST (in)	BORE DIA (in)	TYPE
P461-2203	9/16	2	1/2	SLV
P461-2503	.70	3	5/8	SLV
P461-2501	1	3	5/8	BALL
P461-2306	1-1/8	3-3/8	3/4	BALL
P461-2104	1-5/16	3-3/4	1	BALL
P461-2904	1-5/16	3-3/4	1-3/16	BALL