
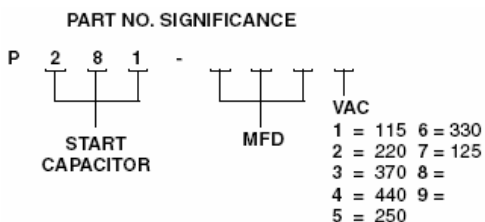


# ELECTRICAL

## TOTALINE® START CAPACITORS

(with bleed resistor)



### 115 VOLTS

PART NO	MFD RANGE	DIAMETER (in)	LENGTH (in)
P281-3211	321-421	1.81	3.37

### 125 VOLTS

PART NO	MFD RANGE	DIAMETER (in)	LENGTH (in)
P281-2107	21-25	1.43	2.75
P281-2507	25-30	1.43	2.75
P281-4307	43-56	1.43	2.75
P281-5607	56-72	1.43	2.75
P281-7207	72-88	1.43	2.75
P281-8807	88-108	1.43	2.75
P281-1087	108-130	1.43	2.75
P281-1247	124-156	1.43	2.75
P281-1457	145-175	1.43	3.37
P281-1617	161-193	1.43	3.37
P281-1897	189-227	1.43	3.37
P281-2007	200-240	1.43	3.37
P281-2167	216-259	1.81	3.37
P281-2337	233-280	1.81	3.37
P281-2407	240-260	1.43	3.37
P281-2707	270-324	1.81	3.37
P281-3017	301-360	2.56	4.37
P281-3247	324-388	1.43	4.37
P281-3407	340-408	1.81	3.37
P281-3787	378-454	1.81	3.37
P281-4007	400-480	1.81	3.37
P281-4317	431-516	1.81	3.37
P281-4607	460-552	1.81	3.37
P281-5407	540-648	1.81	4.37
P281-5907	590-708	1.81	4.37
P281-7087	708-850	1.81	4.37

### 160 VOLTS

PART NO	MFD RANGE	DIAMETER (in)	LENGTH (in)
P281-8801	88-108	1.43	3.37

### 250 VOLTS

PART NO	MFD RANGE	DIAMETER (in)	LENGTH (in)
P281-3105	31-37	1.43	3.37
P281-3805	38-46	1.43	3.37
P281-5305	53-64	1.81	3.37
P281-8802*	88-108	1.81	4.37
P281-8805	88-108	1.81	4.37
P281-1085	108-130	1.81	4.37
P281-1245	124-149	2.06	4.37
P281-1305	130-156	2.56	4.37
P281-1455	145-175	2.56	4.37
P281-1615	161-193	2.56	4.37
P281-1895	189-227	2.56	4.37
P281-2005	200-240	2.06	4.37
P281-2162*	216-259	2.06	4.37
P281-2165	216-259	2.06	4.37
P281-2335	233-292	2.06	4.37
P281-2705	270-324	2.56	4.37
P281-3015	301-360	2.06	4.37
P281-3245	324-388	2.56	4.37
P281-3405	340-408	2.56	4.37
P281-3785	378-454	2.56	4.37
P281-4005	400-480	2.56	4.37
P281-4305	430-516	2.56	4.37
P281-4605	460-552	2.56	4.37
P281-5405	540-648	2.56	4.37
P281-5905	590-708	2.56	4.37

\* 220 volts.

### 330 VOLTS

PART NO	MFD RANGE	DIAMETER (in)	LENGTH (in)
P281-2106	21-25	1.43	3.37
P281-4306*	43-53	1.43	3.37
P281-6106*	61-72	1.81	3.37
P281-6406*	64-77	1.81	4.37
P281-7206	72-88	1.81	4.37
P281-7506	75-90	1.81	4.37
P281-8806	88-108	2.06	4.37
P281-1086	108-130	2.56	4.37
P281-1246	124-149	2.56	4.37
P281-1356*	135-155	2.56	4.37
P281-1456	145-175	2.56	4.37
P281-1616	161-193	1.43	2.75
P281-1896S	189-227	2.06	4.37
P281-2006	200-240	2.06	5.24
P281-2166	216-259	2.06	5.24
P281-2336	233-280	2.56	4.37
P281-2406	240-266	2.56	4.37
P281-2706	270-324	2.56	4.37
P281-3006	300-360	2.56	4.37
P281-3246	324-388	2.56	4.37
P281-3406	340-408	2.56	4.37
P281-3786	378-454	2.56	4.37
P281-4016	401-480	2.56	4.37

\* 320 volts.

ELECTRICAL