


ELECTRICAL


CABLE TIES Natural

Standard Ties • versatile, multiple purpose

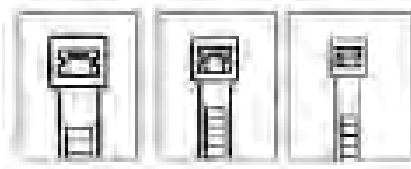

PART NO	MINIMUM TENSILE UNLOCKING STRENGTH	MAXIMUM BUNDLE DIAMETER	(APPROX)		
			WIDTH	LENGTH	QTY/PKG
P298-TF3	18 lbs. (8.2 kg)	7/8" (22.2 mm)	.095" (2.4 mm)	4.1" (10.4 cm)	100
P298-TF3B	18 lbs. (8.2 kg)	7/8" (22.2 mm)	.095" (2.4 mm)	4.1" (10.4 cm)	1000
P298-TF4	40 lbs. (18.1 kg)	1-7/16" (36.5 mm)	.140" (3.5 mm)	5.8" (14.8 cm)	100
P298-TF4B	40 lbs. (18.1 kg)	1-7/16" (36.5 mm)	.140" (3.5 mm)	5.8" (14.8 cm)	1000
P298-TF5	50 lbs. (22.7 kg)	1-7/8" (47.6 mm)	.180" (4.5 mm)	7.5" (19.2 cm)	100
P298-TF5B	50 lbs. (22.7 kg)	1-7/8" (47.6 mm)	.180" (4.5 mm)	7.5" (19.2 cm)	1000
P298-TF6	50 lbs. (22.7 kg)	3-1/16" (77.7 mm)	.180" (4.5 mm)	11.3" (28.5 cm)	50
P298-TF6B	50 lbs. (22.7 kg)	3-1/16" (77.7 mm)	.180" (4.5 mm)	11.3" (28.5 cm)	1000
P298-TF8	50 lbs. (22.7 kg)	4-1/8" (104.7 mm)	.180" (4.5 mm)	14.5" (36.9 cm)	50
P298-TF8B	50 lbs. (22.7 kg)	4-1/8" (104.7 mm)	.180" (4.5 mm)	14.5" (36.9 cm)	1000

Heavy Duty Ties • extra strong for more demanding applications




PART NO	MINIMUM TENSILE UNLOCKING STRENGTH	MAXIMUM BUNDLE DIAMETER	(APPROX)		
			WIDTH	LENGTH	QTY/PKG
P298-TF7	120 lbs. (54.4 kg)	4-1/16" (103.1 mm)	.300" (7.6 mm)	15" (38.3 cm)	25
P298-TF7B	120 lbs. (54.4 kg)	4-1/16" (103.1 mm)	.300" (7.6 mm)	15" (38.3 cm)	500

Heavy Duty Duct Straps • for use with flexible air ducts and air connectors

PART NO	MINIMUM TENSILE UNLOCKING STRENGTH	MAXIMUM BUNDLE DIAMETER	(APPROX)		
			WIDTH	LENGTH	QTY/PKG
P298-TF12	175 lbs. (79.3 kg)	11" (279.4 mm)	.340" (8.6 mm)	37.3" (94.6 cm)	25
P298-TF48	175 lbs. (79.3 kg)	14.5" (368.3mm)	.340" (8.6 mm)	48.5" (123.1 cm)	25
P298-TF488	175 lbs. (79.3 kg)	14.5" (368.3mm)	.340" (8.6 mm)	48.5" (123.1 cm)	(Gray)25

Mounting Cable Ties • one piece for quick, simple bundling and mounting



PART NO	MINIMUM TENSILE UNLOCKING STRENGTH	MAXIMUM BUNDLE DIAMETER	(APPROX)		
			WIDTH	LENGTH	QTY/PKG
P298-TF3H	30 lbs. (13.6 kg)	1-1/4" (31.7 mm)	.138" (3.5 mm)	5.8" (14.9 cm)	100
P298-TF3HB	30 lbs. (13.6 kg)	1-1/4" (31.7 mm)	.138" (3.5 mm)	5.8" (14.9 cm)	1000
P298-TF5H	50 lbs. (22.7 kg)	1-3/4" (44.4 mm)	.177" (4.4 mm)	8.0" (20.3 cm)	50
P298-TF5HB	50 lbs. (22.7 kg)	1-3/4" (44.4 mm)	.177" (4.4 mm)	8.0" (20.3 cm)	1000
P298-TF7H	120 lbs. (54.4 kg)	4-1/16" (103.1 mm)	.298" (7.5 mm)	15.7" (39.8 cm)	50
P298-TF7HB	120 lbs. (54.4 kg)	4-1/16" (103.1 mm)	.298" (7.5 mm)	15.7" (39.8 cm)	500

ELECTRICAL