


## EMERSON CONDENSER FAN MOTORS

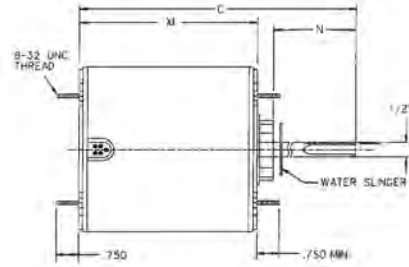

- AUTOMATIC RESET THERMAL PROTECTION
- PERMANENT SPLIT CAPACITOR
- 60 DEGREE C AMBIENT DESIGN
- 30" LEADS
- HUBLESS LEAD END
- REVERSIBLE ROTATION

### SINGLE SPEED

H.P.	VOLTAGE	RPM SPEED(S)	FLA	BRGS.	CAPACITOR MFD/VOLTS	CAPACITOR Part No.	DIMENSIONS (IN.)			MOTOR Part No.
							N	XI	C	
1/6	208/230	1075/1	1	SLV	5/370	<b>P291-0503</b>	5.0	3.8	9.4	<b>1859</b>
1/4	208/230	1075/1	1.7	SLV	5/370	<b>P291-0503</b>	5.0	4.1	9.6	<b>1860-E</b>
1/3	208/230	1075/1	2.1	SLV	7.5/370	<b>P291-0753</b>	5.0	4.6	10.1	<b>1861</b>
1/2	208/230	1075/1	3	SLV	10/370	<b>P291-1003</b>	6.0	5.3	11.9	<b>1862</b>
3/4	208/230	1075/1	4.5	SLV	10/370	<b>P291-1003</b>	5.0	5.8	10.3	<b>1868</b>

### TWO SPEED

H.P.	VOLTAGE	RPM SPEED(S)	FLA	BRGS.	CAPACITOR MFD/VOLTS	CAPACITOR Part No.	DIMENSIONS (IN.)			MOTOR Part No.
							N	XI	C	
1/4	208/230	1075/2	1.9	SLV	5/370	<b>P291-0503</b>	6.0	4.3	10.8	<b>8669</b>
1/3	208/230	1075/2	2.2	SLV	7.5/370	<b>P291-0753</b>	6.0	4.8	11.4	<b>8670</b>
1/2	208/230	1075/2	2.9	SLV	10/370	<b>P291-1003</b>	6.0	4.3	10.8	<b>8671</b>

### Emerson Direct Drive Blower Motors

#### Three Speed

#### STANDARD EFFICIENCY

- 24" LEADS
- SINGLE PHASE, 60 HERTZ
- 2.5" DIA. HUB RINGS
- REVERSIBLE ROTATION
- AUTOMATIC RESET THERMAL PROTECTION
- PERMANANT SPLIT CAPACITOR
- SLEEVE BEARINGS
- CLASS A INSULATION

H.P.	Voltage	RPM Speed(S)	FLA	Capactor MFD/Volts	Part No.
1/4	115	1075/3	3.9	5/370	1863
1/4	208-230	1075/3	1.8	5/370	1971
1/3	115	1075/3	5	7.5/370	1864
1/3	208-230	1075/3	2.4	5/370	1972
1/2	115	1075/3	7.4	10/370	1865
1/2	208-230	1075/3	3.3	7.5/370	1973
3/4	115	1075/3	9.1	15/370	8904
3/4	208-230	1075/3	4.6	10/370	8905