



DOUBLE SHAFT FAN PERMANENT SPLIT CAPACITOR

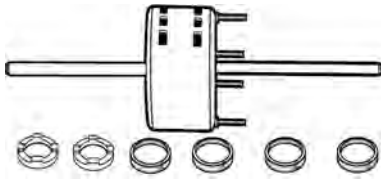


- Rated continuous air over
- Automatic thermal protection
- Extended thru-bolts
- Doubleshaft, 1/2" Dia., 8" each side
- Class B insulation
- 20" leads
- Furnished without run capacitor
- Length adapter kit included to facilitate mounting in cradle type base.




PART NO	HP	VOLTS	PH	HZ	FLA	THER	RPM	SPD	ROTAT	BRGS	FRM	SHAFT POS	SHAFT DIA	SHAFT LENGTH	DIA	A	CAPACITOR MFD/VOLT
P257-8651	1/6	115	1	60	2.4	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8652	1/6	208-230	1	60	1.0	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8671	1/4	115	1	60	3.7	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8672	1/4	208-230	1	60	1.7	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8872	1/4	208-230	1	60	1.2	AUTO	1625	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8682	1/3	208-230	1	60	2.5	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8882	1/3	208-230	1	60	1.9	AUTO	1625	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370
P257-8692	1/2	208-230	1	60	3.5	AUTO	1075	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	7.5/370
P257-8892	1/2	208-230	1	60	3.0	AUTO	1625	3	CCW	SLV	48Y	ALL	1/2	8.0/8.0	5.6	20.0	5/370

BLOWER TOTALINE®

BELTED SPLIT PHASE




- NEMA Service Factors
 - Open drip-proof construction
 - 40°C ambient
 - Reversible rotation by electrical reconnection
 - Class A insulation - 1/6 thru 1/2 H.P.
 - Class B insulation - 3/4 thru 1 H.P.
 - All 5/8" dia. shaft motors are keyed.
- The following motors mounting holes are combination 48 & 56, shaft height is 3.0", includes 5/8" dia. shaft adapter:
 • P267-9305 • P267-9758 • P267-9308




PART NO	HP	VOLTS	PH	HZ	FLA	SF	THERM	RPM	SPD	ROTAT	BRGS	FRM	SHAFT	SHAFT	DIA	A	C
P267-9305	1/4	115	1	60	4.4	1.35	AUTO	1725	1	REV	SLV	48(R)	1/2	1.5	5.6	9.4	3.0
P267-9308	1/3	115	1	60	5.4	1.35	AUTO	1725	1	REV	SLV	48(R)	1/2	1.5	5.6	9.9	3.0
P267-9309	1/3	230	1	60	2.7	1.35	AUTO	1725	1	REV	SLV	48(R)	1/2	1.6	5.7	9.9	3.0
P267-9758	1/2	115	1	60	7.9	1.25	AUTO	1725	1	REV	BALL	48(R)	1/2	1.5	5.6	9.9	3.0
P267-9392	1/2	115	1	60	8.0	1.25	AUTO	1725	1	REV	SLV	56(R)	5/8	2.0	6.5	9.8	3.5
P267-D136	1/2	115/230	1	60	8.0/4.0	1.25	AUTO	1725	1	REV	SLV	56(R)	5/8	2.0	6.5	9.8	3.5
P267-D231	3/4	115	1	60	11.8	1.25	AUTO	1725	1	REV	SLV	56(R)	5/8	2.0	6.5	9.8	3.5
P267-D232	3/4	230	1	60	5.6	1.25	AUTO	1725	1	REV	SLV	56(R)	5/8	2.0	6.5	9.8	3.5

CAPACITOR START



- NEMA Service Factors
- Resilient mount
- Open drip-proof construction
- 40°C ambient
- Class A insulation - 1/2 H.P.
- Class B insulation - 3/4 and 1 H.P.
- Reversible rotation by electrical reconnection



PART NO	HP	VOLTS	PH	HZ	FLA	SF	THERM PROT	RPM	SPD	ROTAT	BRGS	FRM	SHAFT DIA	SHAFT LEN	DIA	A	C
P268-E223	1/2	115/230	1	60	8.6/4.3	1.25	AUTO	1725	1	REV	BALL	56	5/8	2.0	5.6	9.3	3.5
P268-E231	3/4	115/230	1	60	11.4/5.7	1.25	AUTO	1725	1	REV	BALL	56	5/8	2.0	5.6	10.8	3.5
P268-E236	1	115/230	1	60	13.0/6.5	1.15	AUTO	1725	1	REV	BALL	56	5/8	2.0	6.2	11.8	3.5